

2013



Complete TorqueControl Program



Professional TorqueControl Screwdrivers



Wiha Professional TorqueControl Adjustable iTorque Tools

iTorque Screwdrivers

- Metric (Nm) & Inch (In-lbs / oz)
- Built in click counter
- Auto shut off
- Fast adjusting
- Cycle Counter
- Accurate +/- 6%



Digital Torque Control

Interchangeable blades or bits

With Certificate of Calibration Included

52 Piece Set



With Certificate of Calibration

[SHOP](#)

28892 52 Piece iTorque Bit Set, In Metal Storage Box

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M.

Set includes ergonomic multi-component adjustable iTorque handle 7-26 in/lbs., 50 insert bits & 1/4" bit holder.

| Item No. | | ↕ |
|--------------|---|------|
| 28892 | Slotted: 4.5, 5.5, 6.5, 8.0mm | lbs. |
| | Phillips: #0, #1, #2, #3 | 2.02 |
| | TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30 | |
| | Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16" | |
| | Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm | |
| | Pozidriv: #0, #1, #2, #3 | |
| | Torq Set: #4, #5, #6, #8 | |
| | Square: #1, #2, #3 | |
| | Triwing: #0, #1, #2, #3, #4 | |
| | iTorque Handle Range 7 - 26 Inch/lbs. | |
| | 28581 - 1/4" Bit Holder | |



52 Piece Set



With Certificate of Calibration

[SHOP](#)

28891 52 Piece iTorque Bit Set, In Metal Storage Box

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M.

Set includes ergonomic multi-component adjustable iTorque handle 60-210 in/oz., 50 insert bits & 1/4" bit holder.

| Item No. | | ↕ |
|--------------|---|------|
| 28891 | Slotted: 4.5, 5.5, 6.5, 8.0mm | lbs. |
| | Phillips: #0, #1, #2, #3 | 2.02 |
| | TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30 | |
| | Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16" | |
| | Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm | |
| | Pozidriv: #0, #1, #2, #3 | |
| | Torq Set: #4, #5, #6, #8 | |
| | Square: #1, #2, #3 | |
| | Triwing: #0, #1, #2, #3, #4 | |
| | iTorque Handle Range 60 - 210 Inch/oz. | |
| | 28581 - 1/4" Bit Holder | |

52 Piece Set



With Certificate of Calibration

[SHOP](#)

28893 52 Piece iTorque Bit Set, In Metal Storage Box

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M.

Set includes ergonomic multi-component adjustable iTorque handle 9-50 in/lbs., 50 insert bits & 1/4" bit holder.

| Item No. | | ↕ |
|--------------|---|------|
| 28893 | Slotted: 4.5, 5.5, 6.5, 8.0mm | lbs. |
| | Phillips: #0, #1, #2, #3 | 2.08 |
| | TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30 | |
| | Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16" | |
| | Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm | |
| | Pozidriv: #0, #1, #2, #3 | |
| | Torq Set: #4, #5, #6, #8 | |
| | Square: #1, #2, #3 | |
| | Triwing: #0, #1, #2, #3, #4 | |
| | iTorque Handle Range 9 - 50 Inch/lbs. | |
| | 28581 - 1/4" Bit Holder | |



Quick Adjusting

Push Button Start
Push Button Conversion

Digital Display

Fast Conversion
Nm to In/lbs.

Wiha Adjustable TorqueControl Tools

Wiha TorqueControl Screwdrivers

- *TorqueFix* factory preset torque
- *TorqueVario* adjustable torque drivers

molded cushion grip two component handles allow for maximum achievable torque to be reached with comfort.

Precise repeatability!

All *TorqueFix* & *TorqueVario* tools are tested and comply with:

- EN ISO 6798
- BS EN 26789
- ASME B107.14M

Each tool has unique serial number and certificate of calibration

Whether it's *TorqueVario-S* or *TorqueFix* - Wiha has a torque screwdriver to cover almost every application



+/-6% accuracy tolerance
Certificate of calibration

[SHOP](#)



Direct Reading Scale

+/-6% accuracy tolerance
Certificate of calibration

[SHOP](#)

285 TorqueFix, With Wiha-SoftFinish® Handle

Fixed Torque value pre-set. Tested in accordance with EN ISO 6798, BS EN 26789, ASME B107.14M, tolerance +/- 6%. Audible and perceptible click when pre-set torque has been attained. Automatically resets for next torque cycle; 50% greater reverse torque.

| Item No. | Pre-Sets | | Torque | | | | pkg. |
|----------|----------|------|--------|-----|------|------|------|
| | oz. | lbs. | Nm | mm | Inch | lbs. | |
| 28503 | 80 | 5 | 0.56 | 112 | 4.4 | .16 | 1 |
| 28505 | 120 | 7.5 | 0.84 | 112 | 4.4 | .15 | 1 |
| 28507 | 160 | 10 | 1.12 | 119 | 4.7 | .28 | 1 |
| 28509 | 200 | 12.5 | 1.41 | 119 | 4.7 | .27 | 1 |
| 28511 | 240 | 15 | 1.69 | 119 | 4.7 | .27 | 1 |
| 28513 | 320 | 20 | 2.25 | 119 | 4.7 | .28 | 1 |
| 28515 | 400 | 25 | 2.82 | 126 | 4.9 | .37 | 1 |
| 28517 | 480 | 30 | 3.39 | 126 | 4.9 | .37 | 1 |
| 28518 | 560 | 35 | 3.95 | 126 | 4.9 | .37 | 1 |
| 28519 | 640 | 40 | 4.52 | 126 | 4.9 | .37 | 1 |
| 28521 | 800 | 50 | 5.65 | 132 | 5.2 | .52 | 1 |
| 28523 | 960 | 60 | 6.78 | 132 | 5.2 | .52 | 1 |
| 28525 | 1120 | 70 | 7.91 | 132 | 5.2 | .52 | 1 |

285 Adjustable TorqueVario With Direct Reading Scale

EN ISO 6798, BS EN 26789, ASME B107.14M. Ergonomic molded multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when the torque setting has been attained, automatically resets for next torque cycle.

| Item No. | Range | | Torque | | |
|----------|----------|---------|-------------|-----------|------|
| | Inch | lbs. | Increments | mm | lbs. |
| 28501* | 15 - 80 | (in/oz) | 2.5 Inch oz | 122 - 127 | .22 |
| 28502 | 5 - 10 | | .5 Inch lbs | 122 - 127 | .41 |
| 28504 | 7.5 - 20 | | .5 Inch lbs | 126 - 131 | .50 |
| 28506 | 10 - 50 | | 2 Inch lbs | 133 - 138 | .59 |
| 28508 | 20 - 70 | | 2 Inch lbs | 137 - 142 | .74 |

Above includes Micro Bit Holder 28583

See 4mm Micro Bits on Page 6

* +/- 10% (This unit only)



+/-6% accuracy tolerance
Certificate of calibration

[SHOP](#)

285 Adjustable TorqueVario-S Handle - In Newton Meter Scale

EN ISO 6798, BS EN 26789, ASME B107.14M. Ergonomic molded multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when the torque setting has been attained, automatically resets for next torque cycle.

| Item No. | Newton | | Torque | | |
|----------|-------------|------------|-----------|------|------|
| | Meter Scale | Increments | mm | lbs. | pkg. |
| 28550* | 0.1 - 0.6Nm | .02 Nm | 122 - 127 | .35 | 1 |
| 28551 | 0.4 - 1.0Nm | .05 Nm | 122 - 127 | .35 | 1 |
| 28552 | 0.8 - 2.0Nm | .10 Nm | 126 - 131 | .45 | 1 |
| 28553 | 1.0 - 5.0Nm | .20 Nm | 133 - 138 | .55 | 1 |
| 28554 | 2.0 - 8.0Nm | .25 Nm | 137 - 142 | .70 | 1 |

* +/- 10% (This unit only)



All *TorqueVario* models include Torque setting adjustment tool

Wiha TorqueControl Blades - For Easy Torque, TorqueFix & TorqueVario Handles



285 Slotted Interchangeable Blades For TorqueFix & TorqueVario

Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

| Item | | | | | Max. Torque | |
|-------|-----|------|-----|------|-------------|------|
| No. | mm | Inch | mm | lbs. | Nm | pkg. |
| 28534 | 1.5 | .059 | 175 | .07 | 0.15 | 1 |
| 28535 | 2.0 | .078 | 175 | .07 | 0.4 | 1 |
| 28536 | 2.5 | .098 | 175 | .07 | 0.4 | 1 |
| 28537 | 3.0 | .118 | 175 | .07 | 0.6 | 1 |
| 28538 | 3.5 | .139 | 175 | .07 | 1.1 | 1 |
| 28539 | 4.0 | .157 | 175 | .07 | 2.5 | 1 |

[SHOP](#)



285 Phillips Interchangeable Blades For TorqueFix & TorqueVario

Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

| Item | | | | | Max. Torque | |
|-------|------|-----|-----|------|-------------|------|
| No. | Size | mm | mm | lbs. | Nm | pkg. |
| 28540 | 000 | 175 | 4.0 | .07 | 0.4 | 1 |
| 28541 | 00 | 175 | 4.0 | .07 | 0.4 | 1 |
| 28542 | 0 | 175 | 4.0 | .07 | 0.9 | 1 |
| 28543 | 1 | 175 | 4.0 | .07 | 3.8 | 1 |
| 28544 | 2 | 175 | 4.0 | .07 | 5.5 | 1 |

[SHOP](#)



285 TORX® Interchangeable Blades For TorqueFix & TorqueVario

TORX® tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

| Item | | | | | Max. Torque | |
|-------|------|-----|-----|------|-------------|------|
| No. | Size | mm | mm | lbs. | Nm | pkg. |
| 28561 | T5 | 175 | 4.0 | .07 | 0.4 | 1 |
| 28562 | T6 | 175 | 4.0 | .07 | 0.6 | 1 |
| 28563 | T7 | 175 | 4.0 | .07 | 0.9 | 1 |
| 28564 | T8 | 175 | 4.0 | .07 | 1.3 | 1 |
| 28565 | T9 | 175 | 4.0 | .07 | 2.5 | 1 |
| 28566 | T10 | 175 | 4.0 | .07 | 3.5 | 1 |
| 28567 | T15 | 175 | 4.0 | .07 | 5.5 | 1 |
| 28568 | T20 | 175 | 4.0 | .07 | 8.0 | 1 |
| 28569 | T25 | 175 | 4.0 | .07 | 8.0 | 1 |

[SHOP](#)



285 TORXPlus® Blades For TorqueFix & TorqueVario

TORXPlus® tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

| Item | | | | | Max. Torque | |
|-------|------|-----|-----|------|-------------|------|
| No. | Size | mm | mm | lbs. | Nm | pkg. |
| 28571 | IP5 | 175 | 4.0 | .07 | 0.5 | 1 |
| 28572 | IP6 | 175 | 4.0 | .07 | 0.8 | 1 |
| 28573 | IP7 | 175 | 4.0 | .07 | 1.3 | 1 |
| 28574 | IP8 | 175 | 4.0 | .07 | 2.0 | 1 |
| 28575 | IP9 | 175 | 4.0 | .07 | 3.0 | 1 |
| 28576 | IP10 | 175 | 4.0 | .07 | 4.5 | 1 |
| 28577 | IP15 | 175 | 4.0 | .07 | 6.6 | 1 |
| 28578 | IP20 | 175 | 4.0 | .07 | 8.0 | 1 |
| 28579 | IP25 | 175 | 4.0 | .07 | 8.0 | 1 |

[SHOP](#)



285 Hex Metric Interchangeable Blades For TorqueFix &

TorqueVario Hex tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

| Item | | | | | Max. Torque | |
|-------|-----|-----|------|-----|-------------|--|
| No. | mm | mm | lbs. | Nm | pkg. | |
| 28545 | 1.5 | 175 | .07 | 0.9 | 1 | |
| 28546 | 2.0 | 175 | .07 | 1.8 | 1 | |
| 28547 | 2.5 | 175 | .07 | 3.8 | 1 | |
| 28548 | 3.0 | 175 | .07 | 5.5 | 1 | |
| 28549 | 4.0 | 175 | .07 | 8.0 | 1 | |

[SHOP](#)



285 Hex Inch Interchangeable Blades For TorqueFix &

TorqueVario Hex tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

| Item | | | | | Max. Torque | |
|-------|------|-----|------|-----|-------------|--|
| No. | Inch | mm | lbs. | Nm | pkg. | |
| 28555 | .050 | 175 | .07 | .4 | 1 | |
| 28556 | 1/16 | 175 | .07 | .9 | 1 | |
| 28557 | 5/64 | 175 | .07 | 1.8 | 1 | |
| 28558 | 3/32 | 175 | .07 | 1.8 | 1 | |
| 28559 | 7/64 | 175 | .07 | 3.8 | 1 | |
| 28560 | 1/8 | 175 | .07 | 3.8 | 1 | |
| 28587 | 9/64 | 175 | .07 | 8.0 | 1 | |
| 28588 | 5/32 | 175 | .07 | 8.0 | 1 | |

[SHOP](#)



285 MagicSpring TORX® Interchangeable Blades For TorqueFix

& TorqueVario blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

| Item | | | | | Max. Torque | |
|-------|------|-----|-----|------|-------------|------|
| No. | Size | mm | mm | lbs. | Nm | pkg. |
| 28512 | T6 | 175 | 4.0 | .07 | 0.6 | 1 |
| 28527 | T7 | 175 | 4.0 | .07 | 0.9 | 1 |
| 28528 | T8 | 175 | 4.0 | .07 | 1.3 | 1 |
| 28529 | T9 | 175 | 4.0 | .07 | 2.5 | 1 |
| 28530 | T10 | 175 | 4.0 | .07 | 3.8 | 1 |
| 28531 | T15 | 175 | 4.0 | .07 | 5.5 | 1 |
| 28532 | T20 | 175 | 4.0 | .07 | 8.0 | 1 |
| 28533 | T25 | 175 | 4.0 | .07 | 8.0 | 1 |

[SHOP](#)



Screw Holding



286 MagicSpring TORXPlus® Interchangeable Blades For

TorqueFix & TorqueVario blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

| Item | | | | | Max. Torque | |
|-------|------|-----|-----|------|-------------|------|
| No. | Size | mm | mm | lbs. | Nm | pkg. |
| 28611 | IP6 | 175 | 4.0 | .07 | 0.8 | 1 |
| 28612 | IP7 | 175 | 4.0 | .07 | 1.3 | 1 |
| 28613 | IP8 | 175 | 4.0 | .07 | 2.0 | 1 |
| 28614 | IP9 | 175 | 4.0 | .07 | 3.0 | 1 |
| 28616 | IP10 | 175 | 4.0 | .07 | 4.5 | 1 |
| 28617 | IP15 | 175 | 4.0 | .07 | 6.6 | 1 |
| 28618 | IP20 | 175 | 4.0 | .07 | 8.0 | 1 |
| 28619 | IP25 | 175 | 4.0 | .07 | 8.0 | 1 |

[SHOP](#)



Screw Holding

*None of the blades featured on this page will function in a TorqueVario Insulated Handle

Wiha SYSTEM 4 Micro Bits



[SHOP](#)

750 SYSTEM 4 Slotted Bits

High alloy CVM steel, hardened, on 4 mm hex stock.

| Item | | | | |
|-------|-----|----|------|------|
| No. | mm | mm | Inch | lbs. |
| 75008 | 0.8 | 28 | 1.1 | .01 |
| 75012 | 1.2 | 28 | 1.1 | .01 |
| 75015 | 1.5 | 28 | 1.1 | .01 |
| 75018 | 1.8 | 28 | 1.1 | .01 |
| 75020 | 2.0 | 28 | 1.1 | .01 |
| 75025 | 2.5 | 28 | 1.1 | .01 |
| 75030 | 3.0 | 28 | 1.1 | .01 |
| 75035 | 3.5 | 28 | 1.1 | .01 |
| 75040 | 4.0 | 28 | 1.1 | .01 |



[SHOP](#)

751 SYSTEM 4 Phillips Bits High alloy chrome-vanadium-molybdenum steel, hardened, on 4 mm hex stock.

| Item | | | | |
|-------|------|----|------|------|
| No. | Size | mm | Inch | lbs. |
| 75105 | 000 | 28 | 1.1 | .01 |
| 75110 | 00 | 28 | 1.1 | .01 |
| 75115 | 0 | 28 | 1.1 | .01 |
| 75120 | 1 | 28 | 1.1 | .01 |



[SHOP](#)

753 SYSTEM 4 Hex Metric Bits

High alloy CVM steel, hardened, on 4 mm hex stock.

| Item | | | | |
|-------|-----|----|------|------|
| No. | mm | mm | Inch | lbs. |
| 75307 | 0.7 | 28 | 1.1 | .01 |
| 75309 | 0.9 | 28 | 1.1 | .01 |
| 75313 | 1.3 | 28 | 1.1 | .01 |
| 75315 | 1.5 | 28 | 1.1 | .01 |
| 75320 | 2.0 | 28 | 1.1 | .01 |
| 75325 | 2.5 | 28 | 1.1 | .01 |
| 75330 | 3.0 | 28 | 1.1 | .01 |
| 75340 | 4.0 | 28 | 1.1 | .01 |



[SHOP](#)

753 SYSTEM 4 Hex Inch Bits High alloy chrome-vanadium-molybdenum steel, hardened, on 4 mm hex stock.

| Item | | | | |
|-------|------|----|------|------|
| No. | Inch | mm | Inch | lbs. |
| 75307 | .028 | 28 | 1.1 | .01 |
| 75309 | .035 | 28 | 1.1 | .01 |
| 75313 | .050 | 28 | 1.1 | .01 |
| 75350 | 1/16 | 28 | 1.1 | .01 |
| 75352 | 5/64 | 28 | 1.1 | .01 |
| 75354 | 3/32 | 28 | 1.1 | .01 |
| 75356 | 7/64 | 28 | 1.1 | .01 |
| 75358 | 1/8 | 28 | 1.1 | .01 |
| 75360 | 9/64 | 28 | 1.1 | .01 |
| 75340 | 5/32 | 28 | 1.1 | .01 |



[SHOP](#)

757 SYSTEM 4 TORX® Bits

High alloy CVM steel, hardened, on 4 mm stock.

| Item | | | | |
|-------|------|----|------|------|
| No. | Size | mm | Inch | lbs. |
| 75703 | T3 | 28 | 1.1 | .01 |
| 75704 | T4 | 28 | 1.1 | .01 |
| 75705 | T5 | 28 | 1.1 | .01 |
| 75706 | T6 | 28 | 1.1 | .01 |
| 75707 | T7 | 28 | 1.1 | .01 |
| 75708 | T8 | 28 | 1.1 | .01 |
| 75709 | T9 | 28 | 1.1 | .01 |
| 75710 | T10 | 28 | 1.1 | .01 |
| 75715 | T15 | 28 | 1.1 | .01 |
| 75720 | T20 | 28 | 1.1 | .01 |



[SHOP](#)

757 SYSTEM 4 Security TORX® Bits

High alloy CVM steel, hardened, on 4 mm stock.

| Item | | | | |
|-------|------|----|------|------|
| No. | Size | mm | Inch | lbs. |
| 75727 | T7s | 28 | 1.1 | .01 |
| 75728 | T8s | 28 | 1.1 | .01 |
| 75729 | T9s | 28 | 1.1 | .01 |
| 75735 | T10s | 28 | 1.1 | .01 |
| 75739 | T15s | 28 | 1.1 | .01 |
| 75742 | T20s | 28 | 1.1 | .01 |



[SHOP](#)

753 SYSTEM 4 Metric Security Hex Bits

High alloy CVM steel, hardened, on 4 mm hex stock.

| Item | | | | |
|-------|-----|----|------|------|
| No. | mm | mm | Inch | lbs. |
| 75322 | 2.0 | 28 | 1.1 | .01 |
| 75327 | 2.5 | 28 | 1.1 | .01 |
| 75332 | 3.0 | 28 | 1.1 | .01 |
| 75342 | 4.0 | 28 | 1.1 | .01 |



[SHOP](#)

753 SYSTEM 4 Security Hex Inch Bits

High alloy CVM steel, hardened, on 4 mm hex stock.

| Item | | | | |
|-------|------|----|------|------|
| No. | Inch | mm | Inch | lbs. |
| 75362 | 5/64 | 28 | 1.1 | .01 |
| 75364 | 3/32 | 28 | 1.1 | .01 |
| 75366 | 7/64 | 28 | 1.1 | .01 |
| 75368 | 1/8 | 28 | 1.1 | .01 |
| 75370 | 9/64 | 28 | 1.1 | .01 |
| 75372 | 5/32 | 28 | 1.1 | .01 |



[SHOP](#)

28583 Adapter Blade For Wiha 4mm MicroBits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

| Item | | | | |
|-------|------|-----|-----|-----------|
| No. | Size | mm | mm | lbs. pkg. |
| 28583 | 4.0 | 149 | 4.0 | .09 1 |

Wiha Adjustable TorqueControl Tool Sets In Durable Storage Box



With Certificate of Calibration

[SHOP](#)



With Certificate of Calibration

[SHOP](#)

28590 24 Piece TorqueVario-S Micro-Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool. Packed in a compact durable storage box.

| Item No. | | ↕ |
|----------|---|------|
| 28590 | Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1 | lbs. |
| | TORX®: T6, T7, T8, T9, T10, T15 | 1.33 |
| | Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32 | |
| | 28504 - Handle Range 7.5 - 20 Inch lbs. | |

28593 24 Piece TorqueVario-S Micro-Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool. Packed in a compact durable storage box.

| Item No. | | ↕ |
|----------|---|------|
| 28593 | Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1 | lbs. |
| | TORX®: T6, T7, T8, T9, T10, T15 | 1.33 |
| | Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32 | |
| | 28501 - Handle Range 15-80 Inch/oz (+/- 10%) | |

53 Piece Set



With Certificate of Calibration

[SHOP](#)

28595 53 Piece TorqueVario-S Bit Set, In Storage Box

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 50 Insert bits, 1/4" Bit holder and Torque adjustment tool.

| Item No. | | ↕ |
|----------|--|------|
| 28595 | Slotted: 4.5, 5.5, 6.5, 8.0mm | lbs. |
| | Phillips: #0, #1, #2, #3 | 2.85 |
| | TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30 | |
| | Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16" | |
| | Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm | |
| | Pozidriv: #0, #1, #2, #3 | |
| | Torque Set: #4, #5, #6, #8 | |
| | Square: #1, #2, #3 | |
| | Triwing: #0, #1, #2, #3, #4 | |
| | 28506 - Handle Range 10 - 50 Inch lbs. | |
| | 28581 - 1/4" Bit Holder | |

59 Piece Set



With Certificate of Calibration

[SHOP](#)

28589 59 Piece TorqueVario-S Bit Set, In Storage Box

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes 3 ergonomic multi-component adjustable TorqueVario-S handles, 39 Insert bits, 15 Sockets, 1/4" Bit holder, 1/4" Hex to 1/4" Square adapter and Torque adjustment tool.

| Item No. | | ↕ |
|----------|---|------|
| 28589 | Slotted: 4.5, 5.5, 6.5mm | lbs. |
| | Phillips: #0, #1, #2 | 2.58 |
| | TORX®: T5, T6, T7, T8, T9, T10, T15, T20, T25, T30 | |
| | Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4" | |
| | Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0mm | |
| | Pozidriv: #1, #2 | |
| | Square: #1, #2, #3 | |
| | Inch Sockets: 1/8, 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8" | |
| | Metric Sockets: 4.0, 4.5, 5.0, 5.5, 6.0, 7.0, 8.0mm | |
| | 3 Handles: 15-80 Inch/oz., 5-10 & 10-50 In/lbs. | |
| | 1/4" Bit Holder & 1/4"Hex to 1/4" Square adapter | |

Wiha TorqueControl Sets In Durable Canvas Pouch



[SHOP](#)

28596 8 Piece TorqueControl Set With Slotted & Phillips Blades
Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 6 blades & Torque adjustment tool. Packed in a durable canvas pouch.

| Item No. | ↔ lbs. |
|--|--------|
| 28596 Slotted: 2.5, 3.0, 3.5, 4.0mm | .95 |
| Phillips: #0, #1 | |
| 28504 - Handle Range 7.5 - 20 Inch lbs. | |

With Certificate of Calibration



[SHOP](#)

28599 14 Piece TorqueControl Set With TORX® & TORXPlus® Blades
Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes Ergonomic multi-component adjustable TorqueVario-S handle, 12 blades & Torque adjustment tool. Packed in a durable canvas pouch.

| Item No. | ↔ lbs. |
|---|--------|
| 28599 TORX®: T7, T8, T9, T10, T15, T20 | 1.25 |
| TORXPlus®: IP7, IP8, IP9, IP10, IP15, IP20 | |
| 28506 - Handle Range 10 - 50 Inch lbs. | |

With Certificate of Calibration



[SHOP](#)

28597 8 Piece TorqueControl Set With TORX® Blades
Certified to EN ISO 6798, BS EN 26789, ASME B107.14M

| Item No. | ↔ lbs. |
|---|--------|
| 28597 TORX®: T7, T8, T9, T10, T15, T20 | 1.01 |
| 28506 - Handle Range 10 - 50 Inch lbs. | |

With Certificate of Calibration



Screw Holding

[SHOP](#)

28690 8 Piece TorqueControl Set With MagicSpring TORXPlus® Screw Holding Blades
Certified to EN ISO 6798, BS EN 26789, ASME B107.14M

| Item No. | ↔ lbs. |
|--|--------|
| 28690 MagicSpring TORXPlus®: IP7, IP8, IP9, IP10, IP15, IP20 | 1.02 |
| 28506 - Handle Range 10 - 50 Inch lbs. | |

With Certificate of Calibration



[SHOP](#)

28598 8 Piece TorqueControl Set With TORXPlus® Blades
Certified to EN ISO 6798, BS EN 26789, ASME B107.14M

| Item No. | ↔ lbs. |
|---|--------|
| 28598 TORXPlus®: IP7, IP8, IP9, IP10, IP15, IP20 | 1.00 |
| 28506 - Handle Range 10 - 50 Inch lbs. | |

With Certificate of Calibration



ESD Safe Adjustable TorqueControl Tools



285 ESD Safe TorqueVario-S, With Window Scale
 EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6% Accuracy
 Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained. With Certificate of accuracy.

| Item No. | Range | Inch lbs. | Increments | mm | lbs. | pkg. |
|----------|----------------|-------------|------------|-----|------|------|
| 28522* | 15 - 80(in/oz) | 2.5 Inch oz | 122 - 127 | .33 | 1 | |
| 28524 | 5 - 10 | .2 Inch lbs | 122 - 127 | .34 | 1 | |
| 28526 | 7.5 - 20 | .5 Inch lbs | 126 - 131 | .42 | 1 | |

* +/- 10% (This unit only)

Each TorqueVario handle has unique serial number and certificate of calibration



28591 24 Piece ESD Safe Adjustable TorqueVario-S Bit Set
 Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.

| Item No. | Size | lbs. |
|--|---|------|
| 28591 | Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1 TORX®: T6, T7, T8, T9, T10, T15 Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32" | 1.31 |
| 28524 - Handle ESD Safe Range 5 - 10 Inch lbs. | | |

[SHOP](#)

28592 24 Piece ESD Safe Adjustable TorqueVario-S Bit Set
 Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.

| Item No. | Size | lbs. |
|--|---|------|
| 28592 | Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1 TORX®: T6, T7, T8, T9, T10, T15 Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32" | 1.31 |
| 28526 - Handle ESD Safe Range 7.5 - 20 Inch lbs. | | |



288 ESD Safe Slotted Interchangeable Blades For TorqueVario-S
 Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

| Item No. | mm | Inch | mm | lbs. | Nm | pkg. |
|----------|-----|------|-----|------|------|------|
| 28801 | 1.5 | .059 | 175 | .07 | 0.15 | 1 |
| 28803 | 2.0 | .078 | 175 | .07 | 0.4 | 1 |
| 28805 | 3.0 | .118 | 175 | .07 | 0.6 | 1 |
| 28807 | 3.5 | .139 | 175 | .07 | 1.1 | 1 |
| 28809 | 4.0 | .157 | 175 | .07 | 2.5 | 1 |

[SHOP](#)



288 ESD Safe Phillips Interchangeable Blades For TorqueVario-S
 Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

| Item No. | Size | mm | mm | lbs. | Nm | pkg. |
|----------|------|-----|-----|------|-----|------|
| 28810 | 000 | 175 | 4.0 | .07 | 0.4 | 1 |
| 28812 | 00 | 175 | 4.0 | .07 | 0.4 | 1 |
| 28814 | 0 | 175 | 4.0 | .07 | 0.9 | 1 |
| 28816 | 1 | 175 | 4.0 | .07 | 3.8 | 1 |

[SHOP](#)



288 ESD Safe TORX® Interchangeable Blades For TorqueVario-S
 TORX® tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, hard chromed.

| Item No. | Size | mm | mm | lbs. | Nm | pkg. |
|----------|------|-----|-----|------|-----|------|
| 28825 | T5 | 175 | 4.0 | .07 | 0.4 | 1 |
| 28826 | T6 | 175 | 4.0 | .07 | 0.6 | 1 |
| 28827 | T7 | 175 | 4.0 | .07 | 0.9 | 1 |
| 28828 | T8 | 175 | 4.0 | .07 | 1.3 | 1 |
| 28829 | T9 | 175 | 4.0 | .07 | 2.5 | 1 |
| 28830 | T10 | 175 | 4.0 | .07 | 3.8 | 1 |

[SHOP](#)



28890 24 Piece TorqueVario-S ESD Safe Micro-Bit Set
 Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool.

| Item No. | Size | lbs. |
|--|---|------|
| 28890 | Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1 TORX®: T6, T7, T8, T9, T10, T15 Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32" | 1.33 |
| 28522 - ESD Safe Handle Range 15-80 Inch/oz. | | |

[SHOP](#)

Wiha Insulated TorqueControl Tools



1000V

Includes Certificate

[SHOP](#)

287 Insulated TorqueVario-S, With Window Scale Insulation

up to 1000 Volt. EN ISO 6798, BS EN 26789, ASME B107.14M, VDE, ASTM F-1505-01 & NFPA70E, +/- 6% Accuracy. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained. Includes *SlimLine* blade holder.

| Item No. | Range | Inch lbs. | Increments | mm | lbs. | pkg. |
|----------|----------|-----------|------------|-----------|------|------|
| 28724 | 7.5 - 20 | .5 | Inch lbs | 126 - 131 | .43 | 1 |
| 28726 | 10 - 50 | 2 | Inch lbs | 133 - 138 | .40 | 1 |
| 28727 | 20 - 70 | 2 | Inch lbs | 137 - 142 | .69 | 1 |

Each TorqueVario handle has unique serial number and certificate of calibration

287 Insulated TorqueVario-S Handle - In Newton Meter Scale

Includes *SlimLine* blade holder.

| Item No. | Range | Nm | mm | lbs. | pkg. |
|----------|-----------|-----|-----|------|------|
| 28734 | 0.6 - 2.0 | 131 | .45 | 1 | |
| 28736 | 1.0 - 5.0 | 138 | .45 | 1 | |
| 28737 | 2.0 - 8.0 | 142 | .72 | 1 | |

Each TorqueVario handle has unique serial number and certificate of calibration

1000Volt



[SHOP](#)

28350 Insulated SlimLine Torque Blade Holder

Chrome-vanadium-molybdenum steel. Through hardened black finish. ClicFix quick release holder securely locks blades.

| Item No. | OAL | OAL | Inch | lbs. | pkg. |
|----------|-----|-----|------|------|------|
| 28350 | 6.0 | 170 | 6.7 | .02 | 1 |

Wiha Insulated SlimLine Blades

33% narrower insulation diameter



Wiha Insulated SlimLine Blades



[SHOP](#)

283 Insulated Slotted SlimLine Blades

High quality CV steel, through hardened. *SlimLine* blades have up to 33% narrower insulation diameter than standard insulated tools.

| Item No. | mm | Inch | Slim Dia. | Max Nm | Inch/ lbs. | lbs. | Pkg. |
|----------|-----|------|-----------|--------|------------|------|------|
| 28308 | 3.0 | .118 | 4.1 | 0.6 | 5.3 | .02 | 1 |
| 28309 | 4.0 | .157 | 4.1 | 2.5 | 22.2 | .02 | 1 |
| 28312 | 5.5 | .216 | 6.1 | 3.8 | 33.7 | .02 | 1 |
| 28315 | 6.5 | .255 | 6.1 | 5.5 | 48.8 | .02 | 1 |



[SHOP](#)

283 Insulated Phillips SlimLine Blades

High quality CV steel, through hardened. *SlimLine* blades have up to 33% narrower insulation diameter than standard insulated tools.

| Item No. | Size | Slim Dia. | Max Nm | Inch/ lbs. | lbs. | Pkg. |
|----------|------|-----------|--------|------------|------|------|
| 28317 | 1 | 4.1 | 3.8 | 33.7 | .02 | 1 |
| 28319 | 2 | 6.1 | 5.5 | 48.8 | .02 | 1 |



[SHOP](#)

283 Insulated Xeno Slotted & Phillips SlimLine Blades

High quality CV steel, through hardened. *SlimLine* blades have up to 33% narrower insulation diameter than standard insulated tools.

| Item No. | Size | Slim Dia. | Max Nm | Inch/ lbs. | lbs. | Pkg. |
|----------|------|-----------|--------|------------|------|------|
| 28327 | 1 | 4.1 | 3.8 | 33.7 | .02 | 1 |
| 28329 | 2 | 6.1 | 5.5 | 48.8 | .02 | 1 |



[SHOP](#)

283 Insulated TORX SlimLine Blades

High quality CV steel, through hardened. *SlimLine* blades have up to 33% narrower insulation diameter than standard insulated tools.

| Item No. | Size | Slim Dia. | Max Nm | Inch/ lbs. | lbs. | Pkg. |
|----------|------|-----------|--------|------------|------|------|
| 28339 | T8 | 4.1 | 1.3 | 11.5 | .02 | 1 |
| 28340 | T10 | 4.1 | 3.8 | 33.7 | .02 | 1 |
| 28341 | T15 | 6.1 | 5.5 | 48.8 | .02 | 1 |
| 28342 | T20 | 6.1 | 5.5 | 48.8 | .02 | 1 |



[SHOP](#)

283 Insulated Square SlimLine Blades

High quality CV steel, through hardened. *SlimLine* blades have up to 33% narrower insulation diameter than standard insulated tools.

| Item No. | Size | Slim Dia. | Max Nm | Inch/ lbs. | lbs. | Pkg. |
|----------|------|-----------|--------|------------|------|------|
| 28346 | 1 | 4.1 | 3.8 | 33.7 | .02 | 1 |
| 28347 | 2 | 6.1 | 5.5 | 48.8 | .02 | 1 |

Insulated Torque & SlimLine Tool Sets



28791 8 Piece Insulated TorqueControl Set With Slotted & Phillips SlimLine Blades Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes Insulated multi-component adjustable TorqueVario-S handle, 5 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

| Item No. | lbs. |
|--|------|
| 28791 SlimLine Slotted: 3.0, 4.0, 5.5mm | .87 |
| SlimLine Phillips: #1, #2 | |
| 28726 - Handle Range 10-50 Inch/lbs. | |
| SlimLine Blade Holder | |

With Certificate of Calibration



28792 16 Piece Insulated TorqueControl Set With SlimLine Blades Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes Insulated multi-component adjustable TorqueVario-S handle, 13 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

| Item No. | lbs. |
|--|------|
| 28792 SlimLine Slotted: 4.0, 5.5, 6.5mm | 1.27 |
| SlimLine Phillips: #1, #2 | |
| SlimLine Terminal Xeno: #1, 2 | |
| SlimLine TORX®: T8, T10, T15, T20 | |
| SlimLine Square: #1, #2 | |
| 28727 - Handle Range 20-70 Inch/lbs. | |
| SlimLine Blade Holder | |

With Certificate of Calibration

T-handle TorqueControl Handles



Includes Calibration Certificate

[SHOP](#)

289 TorqueFix T-handle

EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6% Accuracy
Ergonomic multi-component handle, light and compact.
With Certificate of calibration.

| Item No. | Torque In-lbs. | Torque Nm | mm x mm | lbs. | pkg. |
|--------------|----------------|-----------|----------|------|------|
| 28931 | 53.1 | 6 | 56 x 120 | .81 | 1 |
| 28933 | 70.8 | 8 | 56 x 120 | .82 | 1 |
| 28935 | 88.5 | 10 | 56 x 120 | .79 | 1 |
| 28937 | 106.2 | 12 | 56 x 120 | .79 | 1 |
| 28938 | 110.6 | 12.5 | 56 x 120 | .80 | 1 |
| 28939 | 123.9 | 14 | 56 x 120 | .80 | 1 |

Each TorqueFix T-handle has unique serial number and certificate of calibration



Includes Calibration Certificate

[SHOP](#)

28940 Adjustable TorqueVario STplus T-handle

EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6% Accuracy
Ergonomic multi-component handle, light and compact.

| Item No. | Torque Nm | Torque In-lbs. | mm x mm | lbs. | pkg. |
|--------------|-----------|----------------|----------|------|------|
| 28940 | 5-14 | 44.3-123.9 | 56 x 120 | .81 | 1 |

* (1 Nm 8.8507) (Scale is shown in Nm only)

Wiha TorqueControl Adapters

Adapters For TorqueFix™ & TorqueVario™



[SHOP](#)

28581 Bit Holder Adapter For 1/4" Drive Bits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

| Item | | | | |
|-------|------|-----|-----|-----------|
| No. | Size | mm | mm | lbs. pkg. |
| 28581 | 1/4 | 149 | 4.0 | .09 1 |



[SHOP](#)

28582 Square Drive Adapter For 1/4" Sockets Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

| Item | | | | |
|-------|------|-----|-----|-----------|
| No. | Size | mm | mm | lbs. pkg. |
| 28582 | 1/4 | 145 | 4.0 | .08 1 |



[SHOP](#)

28583 Adapter Blade For Wiha 4mm MicroBits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

| Item | | | | |
|-------|------|-----|-----|-----------|
| No. | Size | mm | mm | lbs. pkg. |
| 28583 | 4.0 | 149 | 4.0 | .09 1 |



[SHOP](#)

28882 ESD Safe Bit Holder Adapter For 1/4" Drive Bits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

| Item | | | | |
|-------|------|-----|-----|-----------|
| No. | Size | mm | mm | lbs. pkg. |
| 28882 | 1/4 | 162 | 4.0 | .09 1 |

Wiha Torque Cable Keys



Torque handles recommended #28552 & #28504

[SHOP](#)

286 Torque Cable Key For Threaded Hex Connectors

For torque controlled fastening of cable plug connectors with Hex heads. Used with Wiha-TorqueControl Screwdrivers.

| Item | | | | Max | | |
|-------|------|-----|----|-----|------|-------|
| No. | Size | mm | mm | Nm | pkg. | lbs. |
| 28620 | 8mm | 4.0 | 78 | 218 | 1.0 | 1 .06 |
| 28622 | 9mm | 4.0 | 78 | 218 | 1.0 | 1 .06 |
| 28624 | 11mm | 4.0 | 78 | 218 | 1.5 | 1 .06 |
| 28626 | 12mm | 4.0 | 78 | 218 | 1.5 | 1 .06 |
| 28627 | 13mm | 4.0 | 78 | 218 | 1.5 | 1 .06 |
| 28629 | 14mm | 4.0 | 78 | 218 | 1.5 | 1 .06 |
| 28632 | 17mm | 4.0 | 78 | 218 | 1.5 | 1 .06 |
| 28633 | 18mm | 4.0 | 78 | 218 | 1.5 | 1 .06 |
| 28637 | 22mm | 4.0 | 90 | 233 | 2.0 | 1 .10 |
| 28638 | 24mm | 4.0 | 90 | 233 | 2.0 | 1 .10 |

28644 Torque Cable Key For Threaded Hex Connectors - Inch

| Item | | | | Max | | |
|-------|------|-----|----|-----|------|-------|
| No. | Size | mm | mm | Nm | pkg. | lbs. |
| 28644 | 1/2" | 4.0 | 78 | 218 | 1.5 | 1 .06 |



“easy” Torque

- Audible Click At Torque
- Replaceable Blades
- +/- 10% Repeatability
- Improve Productivity
- Reduces Waste
- Controls Costs
- Save Time!



Each tool factory preset

Torque accuracy of +/- 10% to 5000 cycles

Economical Torque Control for tooling assembly and repair

Uses 285 interchangeable blades on page 5

Reverse torque is 50% greater for easy removal using same tool

Wiha Easy Torque Handles



292 Easy Torque Screwdriver Handle

Easy Torque value pre-set. Release accuracy +/- 10%. SoftFinish cushion grip handle for good power transfer.

| Item No. | Pre-Sets | | mm | | Inch | | lbs. | pkg. |
|----------|-----------|-----|-----|------|------|------|------|------|
| | Inch/lbs. | Nm | mm | Inch | lbs. | pkg. | | |
| 29205 | 4.4 | 0.5 | 294 | 5.4 | .20 | 1 | | |
| 29206 | 5.3 | 0.6 | 294 | 5.4 | .20 | 1 | | |
| 29209 | 8.0 | 0.9 | 294 | 5.4 | .20 | 1 | | |
| 29211 | 9.7 | 1.1 | 294 | 5.4 | .20 | 1 | | |
| 29212 | 10.6 | 1.2 | 294 | 5.4 | .20 | 1 | | |
| 29214 | 12.4 | 1.4 | 294 | 5.4 | .20 | 1 | | |
| 29220 | 17.7 | 2.0 | 294 | 5.4 | .20 | 1 | | |
| 29225 | 22.1 | 2.5 | 294 | 5.4 | .20 | 1 | | |
| 29230 | 26.6 | 3.0 | 294 | 5.4 | .20 | 1 | | |
| 29238 | 33.6 | 3.8 | 294 | 5.4 | .20 | 1 | | |
| 29241 | 35.4 | 4.0 | 294 | 5.4 | .20 | 1 | | |
| 29245 | 39.8 | 4.5 | 294 | 5.4 | .20 | 1 | | |
| 29251 | 44.2 | 5.0 | 294 | 5.4 | .20 | 1 | | |

* No Calibration Certificates

- Handles are larger for easier Torque application
- SoftFinish Cushion Grips for improved user Comfort
- Design has been improved to add significantly to durability and overall tool life.
- Accuracy remains at +/- 10% with NO certificate of calibration.
- Three additional Torque Handles have been added
4 Nm, 4.5 Nm, 5 Nm



292 Easy Torque Screwdriver Handle With TORX® Blades

Easy Torque value pre-set. Release accuracy +/- 10%.

Internal mechanism clicks when torque value has been attained.

Cushion grip comfortable handle for good power transfer.

| Item No. | Size | Pre-Sets | | lbs. | | pkg. |
|----------|------|-----------|-----|------|------|------|
| | | Inch/lbs. | Nm | lbs. | pkg. | |
| 29232 | T5 | 4.4 | 0.5 | .24 | 1 | |
| 29233 | T6 | 5.3 | 0.6 | .24 | 1 | |
| 29234 | T7 | 8.0 | 0.9 | .24 | 1 | |
| 29236 | T8 | 10.6 | 1.2 | .25 | 1 | |
| 29237 | T9 | 12.4 | 1.4 | .25 | 1 | |
| 29239 | T10 | 17.7 | 2.0 | .26 | 1 | |
| 29242 | T15 | 26.6 | 3.0 | .26 | 1 | |
| 29243 | T20 | 35.4 | 4.0 | .26 | 1 | |
| 29244 | T25 | 44.2 | 5.0 | .28 | 1 | |

* No Calibration Certificates



292 Easy Torque Screwdriver Handle With TORXPlus® Blades

Easy Torque value pre-set. Release accuracy +/- 10%.

Internal mechanism clicks when torque value has been attained.

Cushion grip comfortable handle for good power transfer.

| Item No. | Size | Pre-Sets | | lbs. | | pkg. |
|----------|------|-----------|-----|------|------|------|
| | | Inch/lbs. | Nm | lbs. | pkg. | |
| 29246 | IP5 | 4.4 | 0.5 | .24 | 1 | |
| 29247 | IP6 | 5.3 | 0.6 | .24 | 1 | |
| 29248 | IP7 | 8.0 | 0.9 | .24 | 1 | |
| 29249 | IP8 | 10.6 | 1.2 | .25 | 1 | |
| 29252 | IP9 | 12.4 | 1.4 | .25 | 1 | |
| 29253 | IP10 | 17.7 | 2.0 | .26 | 1 | |
| 29254 | IP15 | 26.6 | 3.0 | .26 | 1 | |
| 29255 | IP20 | 35.4 | 4.0 | .26 | 1 | |
| 29256 | IP25 | 44.2 | 5.0 | .28 | 1 | |


* No Calibration Certificates



Numerical Index by Item Number

| Item No. | Page | Item No. | Page | Item No. | Page | Item No. | Page | Item No. | Page |
|----------|------|----------|------|----------|------|----------|------|----------|------|
| 28308 | 9 | 28547 | 4 | 28624 | 12 | 28923 | 11 | 75025 | 5 |
| 28309 | 9 | 28548 | 4 | 28626 | 12 | 28924 | 11 | 75030 | 5 |
| 28312 | 9 | 28549 | 4 | 28627 | 12 | 28925 | 11 | 75035 | 5 |
| 28315 | 9 | 28550 | 3 | 28629 | 12 | 28926 | 11 | 75040 | 5 |
| 28317 | 9 | 28551 | 3 | 28632 | 12 | 28927 | 11 | 75105 | 5 |
| 28319 | 9 | 28552 | 3 | 28633 | 12 | 28931 | 10 | 75110 | 5 |
| 28327 | 9 | 28553 | 3 | 28637 | 12 | 28933 | 10 | 75115 | 5 |
| 28329 | 9 | 28554 | 3 | 28638 | 12 | 28935 | 10 | 75120 | 5 |
| 28339 | 9 | 28555 | 4 | 28644 | 12 | 28937 | 10 | 75307 | 5 |
| 28340 | 9 | 28556 | 4 | 28690 | 7 | 28938 | 10 | 75309 | 5 |
| 28341 | 9 | 28557 | 4 | 28724 | 9 | 28939 | 10 | 75313 | 5 |
| 28342 | 9 | 28558 | 4 | 28726 | 9 | 28940 | 10 | 75315 | 5 |
| 28346 | 9 | 28559 | 4 | 28727 | 9 | 29102 | 12 | 75320 | 5 |
| 28347 | 9 | 28560 | 4 | 28734 | 9 | 29104 | 12 | 75322 | 5 |
| 28350 | 9 | 28561 | 4 | 28736 | 9 | 29106 | 12 | 75325 | 5 |
| 28501 | 3 | 28562 | 4 | 28737 | 9 | 29108 | 12 | 75327 | 5 |
| 28502 | 3 | 28563 | 4 | 28791 | 10 | 29110 | 12 | 75330 | 5 |
| 28503 | 3 | 28564 | 4 | 28792 | 10 | 29112 | 12 | 75332 | 5 |
| 28504 | 3 | 28565 | 4 | 28801 | 8 | 29114 | 12 | 75340 | 5 |
| 28505 | 3 | 28566 | 4 | 28803 | 8 | 29116 | 12 | 75342 | 5 |
| 28506 | 3 | 28567 | 4 | 28805 | 8 | 29118 | 12 | 75350 | 5 |
| 28507 | 3 | 28568 | 4 | 28807 | 8 | 29120 | 12 | 75352 | 5 |
| 28508 | 3 | 28569 | 4 | 28809 | 8 | 29205 | 14 | 75354 | 5 |
| 28509 | 3 | 28571 | 4 | 28810 | 8 | 29206 | 14 | 75356 | 5 |
| 28511 | 3 | 28572 | 4 | 28812 | 8 | 29209 | 14 | 75358 | 5 |
| 28512 | 4 | 28573 | 4 | 28814 | 8 | 29211 | 14 | 75360 | 5 |
| 28513 | 3 | 28574 | 4 | 28816 | 8 | 29214 | 14 | 75362 | 5 |
| 28515 | 3 | 28575 | 4 | 28825 | 8 | 29220 | 14 | 75364 | 5 |
| 28517 | 3 | 28576 | 4 | 28826 | 8 | 29225 | 14 | 75366 | 5 |
| 28518 | 3 | 28577 | 4 | 28827 | 8 | 29230 | 14 | 75368 | 5 |
| 28519 | 3 | 28578 | 4 | 28828 | 8 | 29232 | 14 | 75370 | 5 |
| 28521 | 3 | 28579 | 4 | 28829 | 8 | 29233 | 14 | 75372 | 5 |
| 28522 | 8 | 28581 | 12 | 28830 | 8 | 29234 | 14 | 75703 | 5 |
| 28523 | 3 | 28582 | 12 | 28882 | 12 | 29236 | 14 | 75704 | 5 |
| 28524 | 8 | 28583 | 5,12 | 28890 | 8 | 29237 | 14 | 75705 | 5 |
| 28525 | 3 | 28587 | 4 | 28891 | 3 | 29239 | 14 | 75706 | 5 |
| 28526 | 8 | 28588 | 4 | 28892 | 3 | 29242 | 14 | 75707 | 5 |
| 28527 | 4 | 28589 | 6 | 28893 | 3 | 29243 | 14 | 75708 | 5 |
| 28528 | 4 | 28590 | 6 | 28903 | 11 | 29244 | 14 | 75709 | 5 |
| 28529 | 4 | 28591 | 8 | 28904 | 11 | 29246 | 14 | 75710 | 5 |
| 28530 | 4 | 28592 | 8 | 28905 | 11 | 29247 | 14 | 75715 | 5 |
| 28531 | 4 | 28593 | 6 | 28906 | 11 | 29248 | 14 | 75720 | 5 |
| 28532 | 4 | 28595 | 6 | 28907 | 11 | 29249 | 14 | 75727 | 5 |
| 28533 | 4 | 28596 | 7 | 28908 | 11 | 29252 | 14 | 75728 | 5 |
| 28534 | 4 | 28597 | 7 | 28910 | 11 | 29253 | 14 | 75729 | 5 |
| 28535 | 4 | 28598 | 7 | 28911 | 11 | 29254 | 14 | 75735 | 5 |
| 28536 | 4 | 28599 | 7 | 28912 | 11 | 29255 | 14 | 75739 | 5 |
| 28537 | 4 | 28611 | 4 | 28913 | 11 | 29256 | 14 | 75742 | 5 |
| 28538 | 4 | 28612 | 4 | 28914 | 11 | 29238 | 14 | | |
| 28539 | 4 | 28613 | 4 | 28915 | 11 | 29241 | 14 | | |
| 28540 | 4 | 28614 | 4 | 28916 | 11 | 29245 | 14 | | |
| 28541 | 4 | 28616 | 4 | 28917 | 11 | 29251 | 14 | | |
| 28542 | 4 | 28617 | 4 | 28918 | 11 | 75008 | 5 | | |
| 28543 | 4 | 28618 | 4 | 28919 | 11 | 75012 | 5 | | |
| 28544 | 4 | 28619 | 4 | 28920 | 11 | 75015 | 5 | | |
| 28545 | 4 | 28620 | 12 | 28921 | 11 | 75018 | 5 | | |
| 28546 | 4 | 28622 | 12 | 28922 | 11 | 75020 | 5 | | |

(800) 494-6104
 fax: (800) 494-7456
 email: cservice@wihatools.com

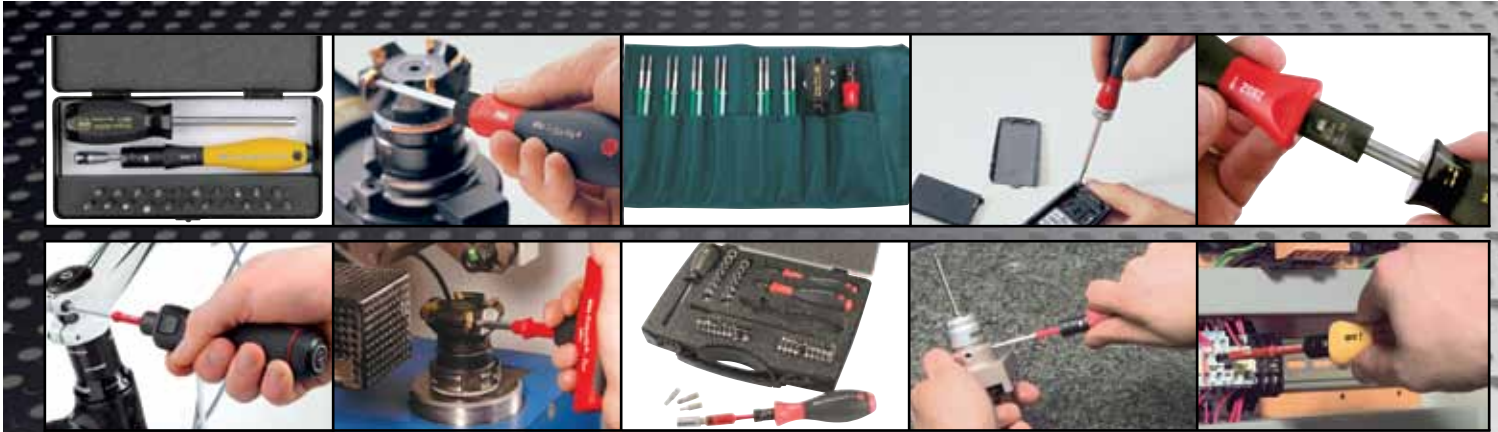

Wiha Quality Tools

1348 Dundas Circle
 Monticello, MN 55362
 tel: 763.295.6591
 fax: 763.295.6598

Wiha Tools Canada Ltd.

www.wihatools.ca
 Brampton, ONT L6T 4X4
 tel: 866.494.0096 or 763.295.6591
 fax: 763.295.6598

To:

Catalog Item No. 99001.w0
 version - 10/1/13

Subject to change
 without notice

©2013 Willi Hahn
 Corporation

®Torx is a registered trademark of
 Acument Intellectual Properties LLC.



99060.w0 - Product Guide



99004.w0 - Shop Tools Catalog



99914.w0 - TORX Catalog



99945.w0 - ESD Safe Catalog




99951.w0 - Bits Catalog



99002.w0 - Screwdrivers Catalog



99934.w0 - Hex Tools Catalog

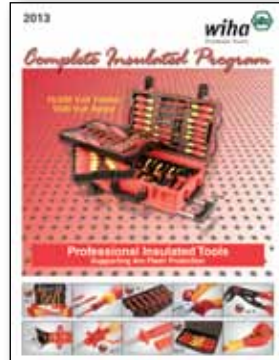

99919.w0 - Insulated Catalog



99006.w0 - Tech Tools Catalog



99977.w0 - Pliers/Crimpers Catalog